



**MANDRINI  
ATTACCO MAS403/BT  
E DOPPIO CONTATTO**

TOOLHOLDERS BT/MAS403  
AND DUAL DRIVE

**6T**



# MANDRINI ATTACCO MAS403/BT E DOPPIO CONTATTO

## TOOLHOLDERS BT/MAS403 AND DUAL DRIVE

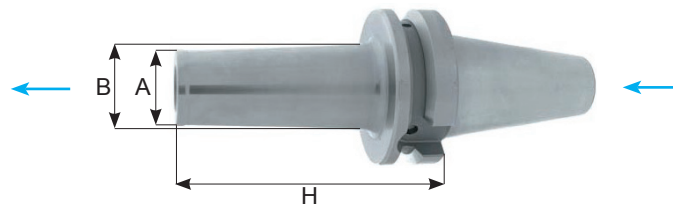


**MANDRINI PORTAFRESE CON FILETTO / ANTIVIBRAZIONE**  
ANTIVIBRATORY SCREW END MILL CHUCKS

**6T**

**Mandrini per frese con attacco filettato con passaggio del refrigerante**

Coolant screw in mill chucks


**BTB40 / 50**

CODICE	FAM	M	FORMA	H	A	B	EUR		
BTB40.H63.M8CPY	1	M8	AD+B	63	13	15			
BTB40.H83.M8CPY				83		23			
BTB40.H103.M8CPY				103		23			
BTB40.H123.M8CPY				123		25			
BTB40.H63.M10CPY		M10		63	18	20			
BTB40.H83.M10CPY				83		23			
BTB40.H103.M10CPY				103		28			
BTB40.H123.M10CPY				123		32			
BTB40.H63.M12CPY		M12		63	21	24			
BTB40.H83.M12CPY				83		24			
BTB40.H103.M12CPY				103		31			
BTB40.H123.M12CPY				123		33			
BTB40.H63.M16CPY		M16		63	29	32			
BTB40.H83.M16CPY				83		34			
BTB40.H103.M16CPY				103		34			
BTB40.H123.M16CPY				123		36			
BTB40.H153.M16CPY				153		40			
BTB50.H104.M12CPY		M12		104	21	33			
BTB50.H154.M12CPY				154		40			
BTB50.H104.M16CPY				M16		104	29	36	
BTB50.H154.M16CPY						154		42.5	

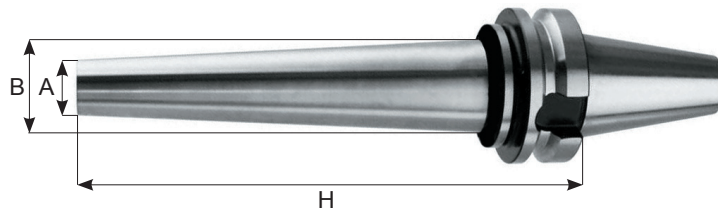
**Momento di serraggio consigliato**

Recommended tightening torque for screwed mills

FILETTO / THREAD	Nm
M8	25
M10	40
M12	60
M16	80

**Mandrini per frese con attacco filettato antivibrazione**

Antivibratory screw in mill chucks


**BT40 / 50**
**ANTIVIBRAZIONE**

CODICE	FAM	M	FORMA	H	A	B	EUR		
BT40.H200.M10AV	13	M10	AD	200	18	35			
BT40.H250.M10AV				250		40			
BT40.H300.M10AV				300		45			
BT40.H200.M12AV		M12		200	21	38			
BT40.H250.M12AV				250		43			
BT40.H300.M12AV				300		44			
BT40.H200.M16AV		M16		200	29	43			
BT40.H250.M16AV				250		44			
BT40.H300.M16AV				300		47			
BT50.H300.M12AV		13		M12	300	21	47		
BT50.H400.M12AV					400		57		
BT50.H300.M16AV				M16	300	29	55		
BT50.H400.M16AV					400		65		
BT50.H500.M16AV						500		76	

**Speciale per stampisti, riduce le vibrazioni del 60% in comparazione allo standard.**

Special for mould and die makers, vibration reduced up to 60% compared to any other conventional shell mill adaptor.

**Momento di serraggio consigliato**

Recommended tightening torque for screwed mills

FILETTO / THREAD	Nm
M8	25
M10	40
M12	60
M16	80